


Karvmärren Manual

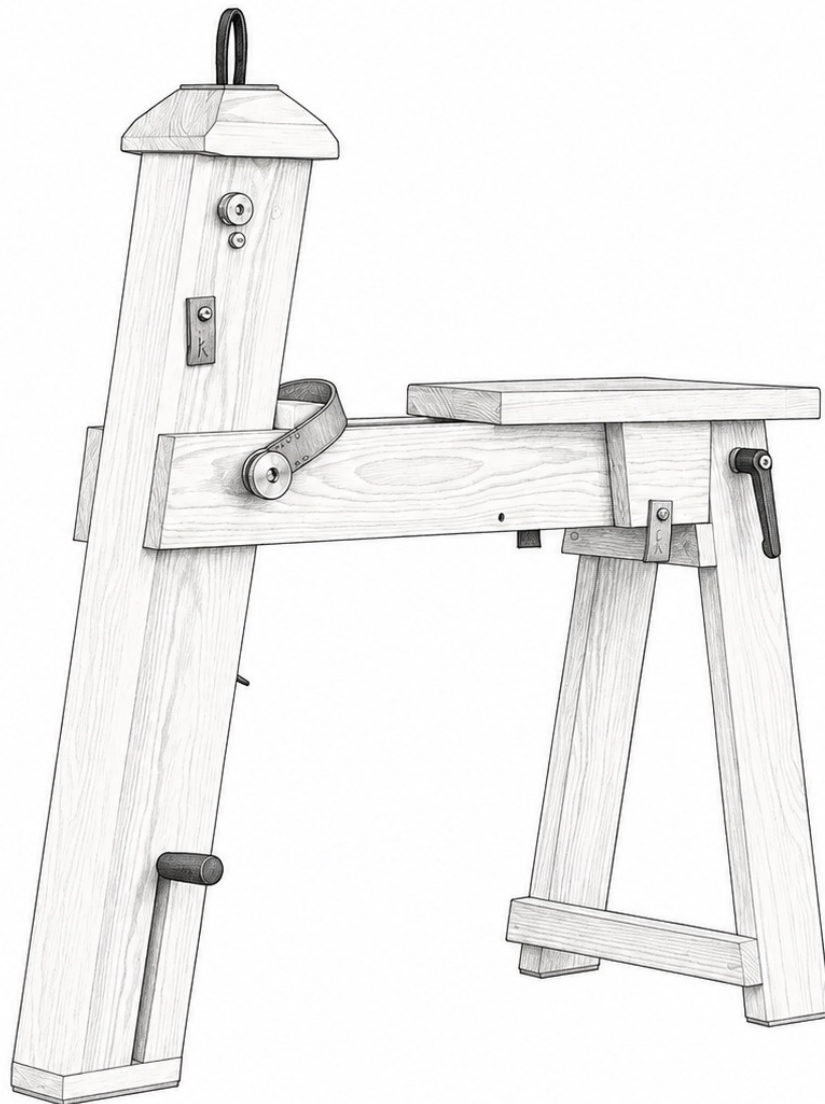

Intro

Hi and thanks a million for supporting Karvmärren. I hope you will enjoy it and feel just as proud as I do.

Karvmärren comes natural and untreated. We believe in patina and hopes that your Karvmärr will age well.



Karvmärren is hand crafted by an enthusiast carver and a carpenter as a 2 man operation. We only use high quality furniture dry pine.

Wood is a natural material with the ability to release and absorb moisture from the surrounding air and materials.

That means that the wood "lives" or in other words, swells and shrinks depending of the humidity. With that said could Karvmärren feel "tighter" or "looser" depending on the climate. So **remember to check and tighten the big thumb nuts and leg levers before every use.**


The product Karvmärren is provided on an "as is" basis. Use of Karvmärren is entirely at the user's own risk. To the fullest extent permitted by applicable law, the seller and manufacturer disclaim all liability for any direct or indirect damage, loss, personal injury, or consequential damage arising out of or in connection with the use, misuse, installation, storage, or handling of the product.

Parts

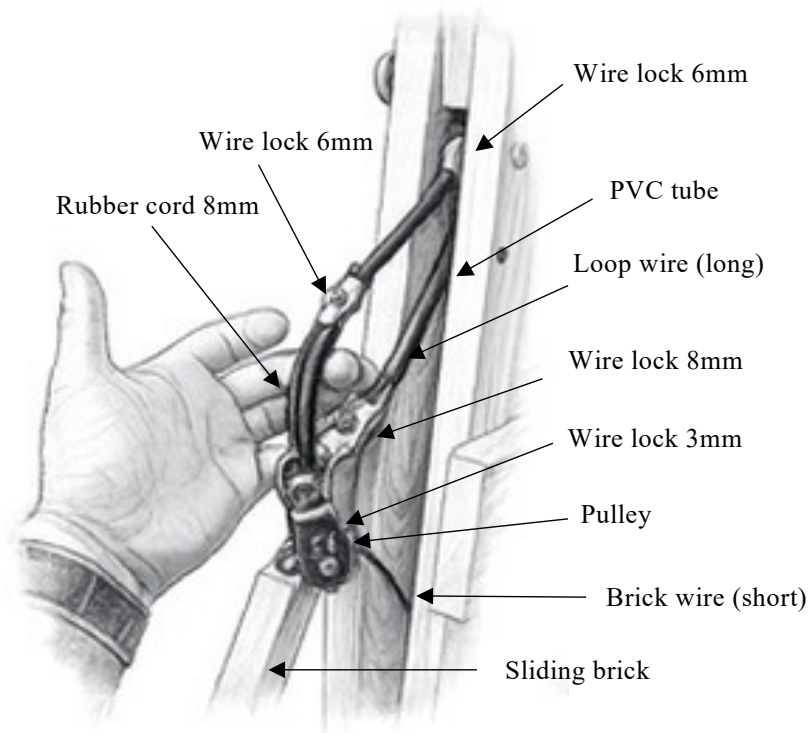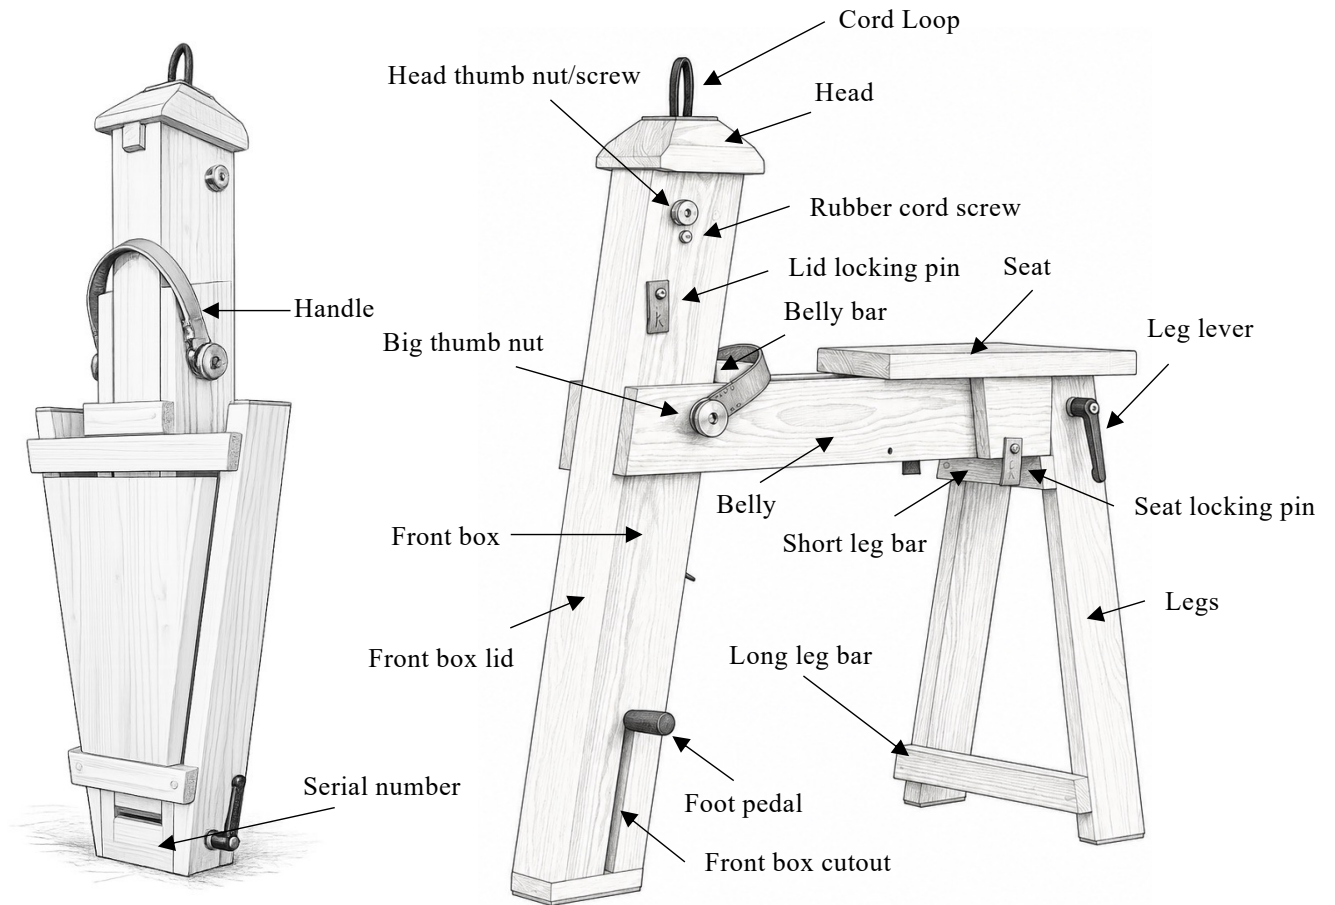


Unfolding


1. Loosen the 2 big thumb nuts and unfold the front box. Tighten the 2 big thumb nuts.

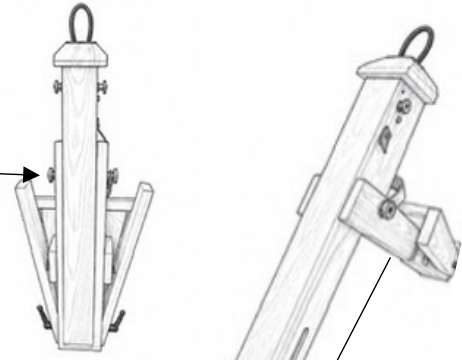


2. Loosen the 2 black levers at least two turns and unfold the legs and tighten the levers. Make sure both front box and legs are leaning towards the "horizontal bars".




3. Pull out the seats 2 locking pins and turn the seat 180 degrees, slide it to the back and put the locking pins back in.

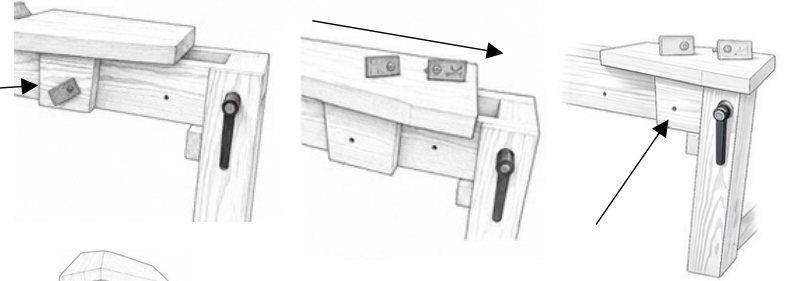


4. Pull out the locking pin for the front box and take off the lid. If the lid still feels too tight, try loosening the 2 head thumb nuts. Take off the lid and put aside.

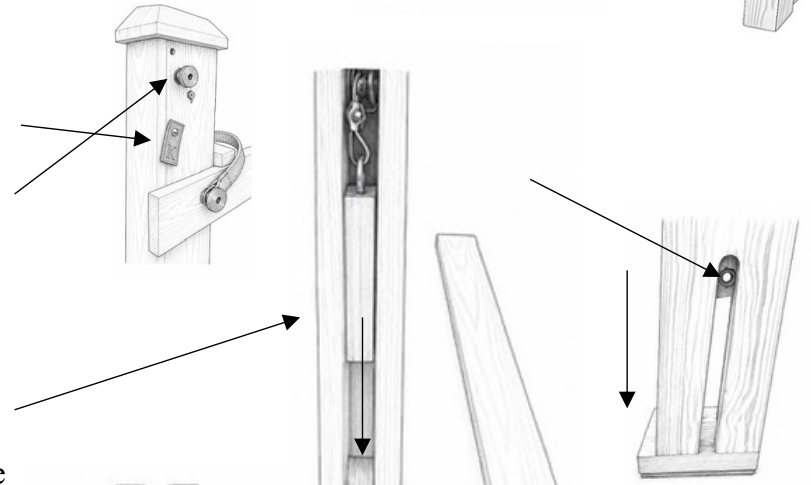

5. Take out the foot pedals. Pull down the "sliding brick" until you can see the threads in the side cut outs. While holding it down, screw the foot pedals into the "sliding brick".

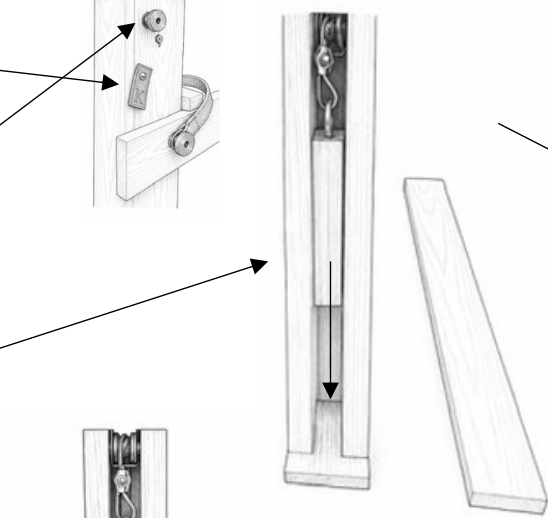


6. Put the front box lid back and secure it with the locking pin, tighten the head thumb nuts.

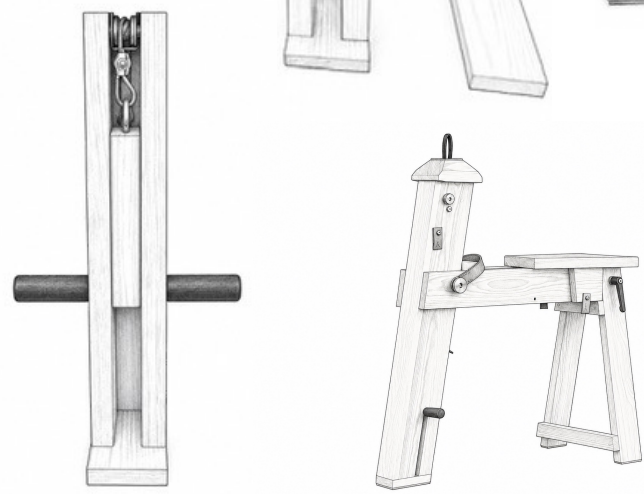


Tilting the head

1. Loosen 1 of the 2 head thumb nuts that's securing the head. Pull out the threaded M6 steel rod.
2. Tilt the head until you can see through the 6mm hole the slithly above the standard hole.
3. Push the M6 rod back in and secure the thumb screws.

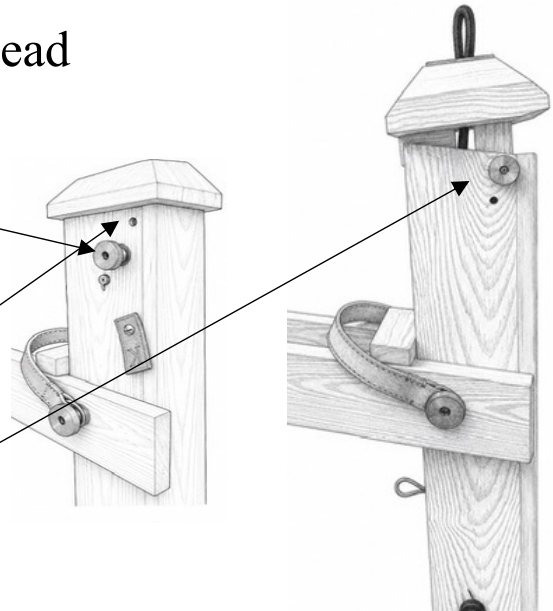

Karvmärren technical

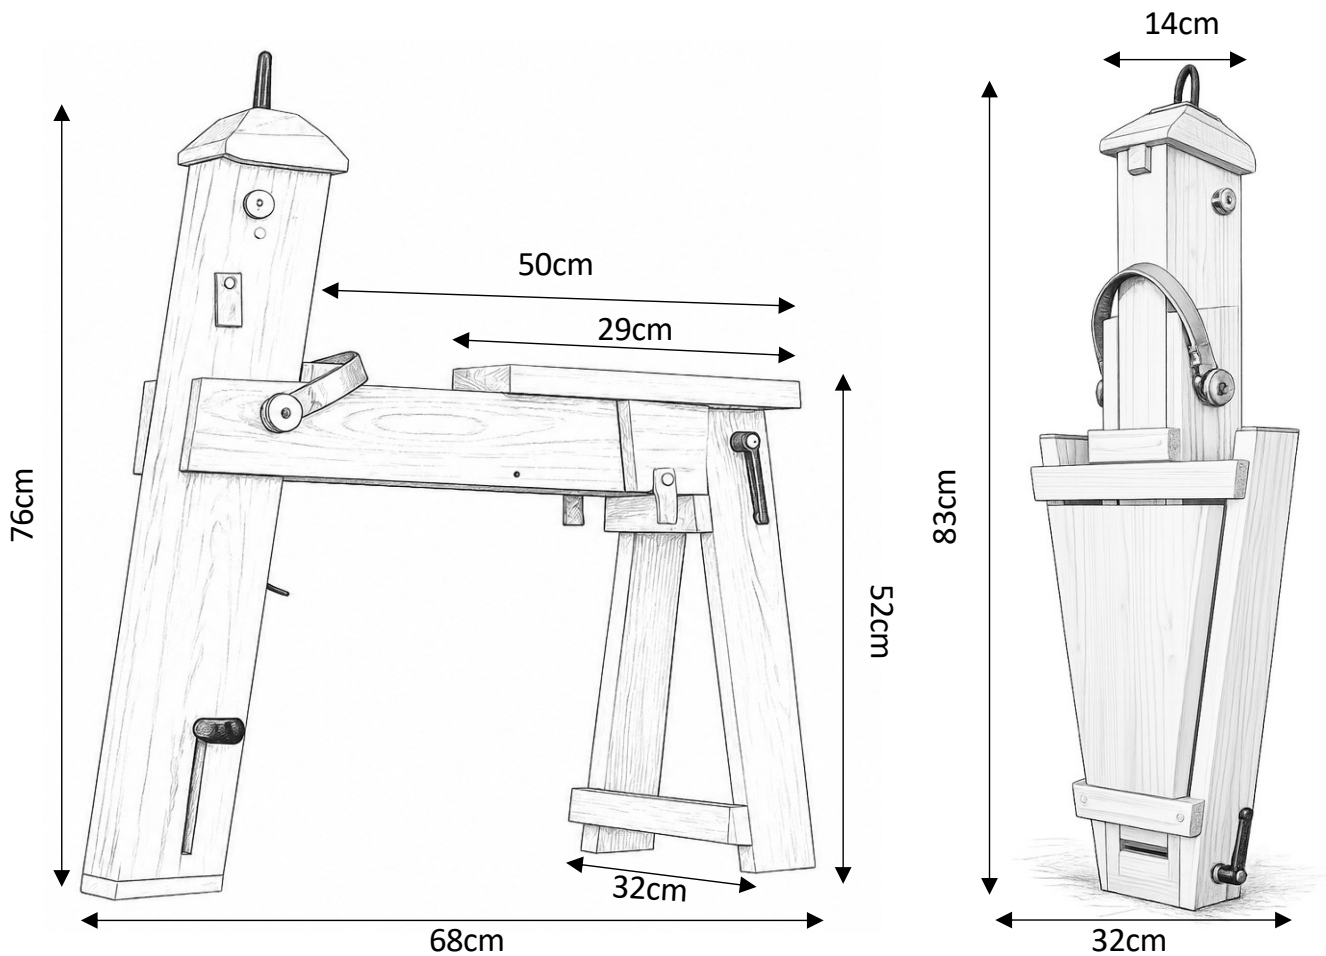

FAQ

The pulley squeeks and makes noises, what can I do to make it less squeaky?

-Add some lubricant as silicon oil to the pulley.

The front box wants to fold in, even though I have tightened the big thumb nuts. What can I do to fixate the front box?

-If you feel like its hard to tighten the big thumb nuts you can try and change them to bigger M10 knobs or for lever handles as those for the legs.

I cut through the cord loop. Can I get a new one?

-Yes of course. Please send a mail to info@karvmarren.com and I'll guide you through the steps.

How do I change the top protection leather?

-Try to carve, cut or shave of the remaining old leather. Sand it down if that's easier. Glue the spare top protection with strong contact glue made for leather & wood.

Technical info:

Material: Pine, stainless steel and natural tanned leather

Head thumb screw: M6

Big thumb screw: M10

Leg lever: M10

Rubber cord screw: 6mm

Rubber cord: 8mm

Holes for locking pins: 6mm

Locking pin screw: M4 x 10mm

Wire: 3mm (2mm steel wire / 1mm PVC cover)

For more info, pictures and media visit www.karvmarren.com
If you have any questions don't hesitate to contact me at info@karvmarren.com